





HRS (Hydrobond Rubber Sealing) Underwater Mateable Connector HRS_05-04_DK (double Keyway)

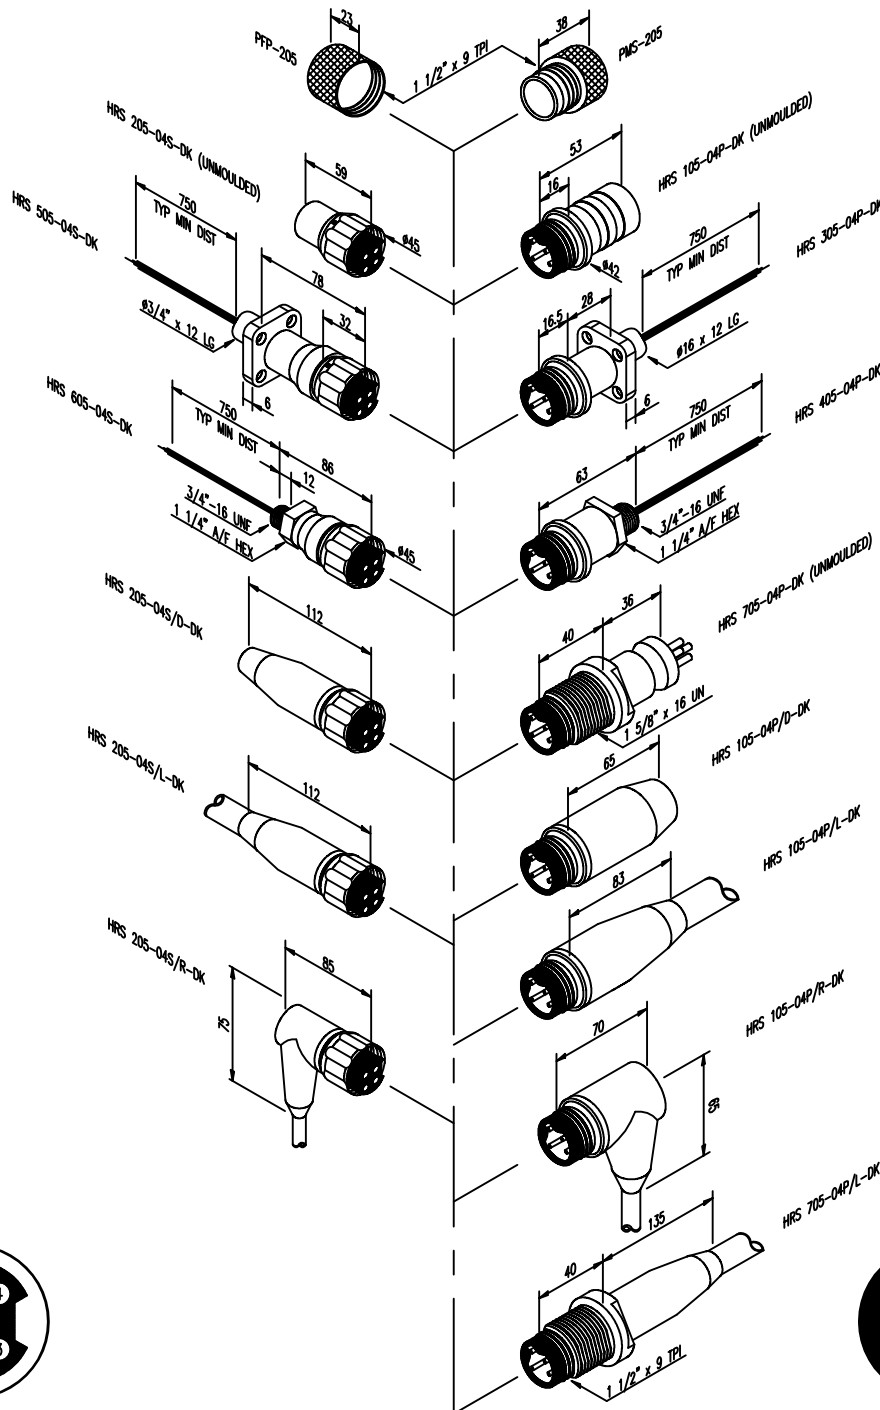

FACE VIEW
SOCKET CONNECTOR



FACE VIEW
PIN CONNECTOR

Electrical and Environmental:

- Pin Current Rating: 16 Amps
- Pin Voltage Rating: 2,000V rms
- Contact to Contact IR: >1,000 MOhms @ 1,000V dc
- Contact to Body IR: >1,000 MOhms @ 1,000V dc
- Mated Depth Rating: 2,440 MSW
- Temperature Rating: -20 C to +60 C
- Conductor Tail Size: 16 AWG
- Solder Bucket Size: 3.0 mm dia

Standard Material Specification:

- Body: 316 Stainless Steel
- Fix Ring: Aluminium Silicon Bronze
- BackShell: N/A
- Contact Pins: CZ121/Au
- Contact Sockets: CZ121/Au
- Insert Material: Neoprene
- Conductor Tails: Spec 44 X 0.75 m.
- O - Rings: NI70

Mechanical:

- Lengths = mm
- Threads = Inches
- Mounting Detail:
See Mounting Detail
Section of Binder