




HRS (Hydrobond Rubber Sealing) Underwater Mateable Connector HRS_11-04

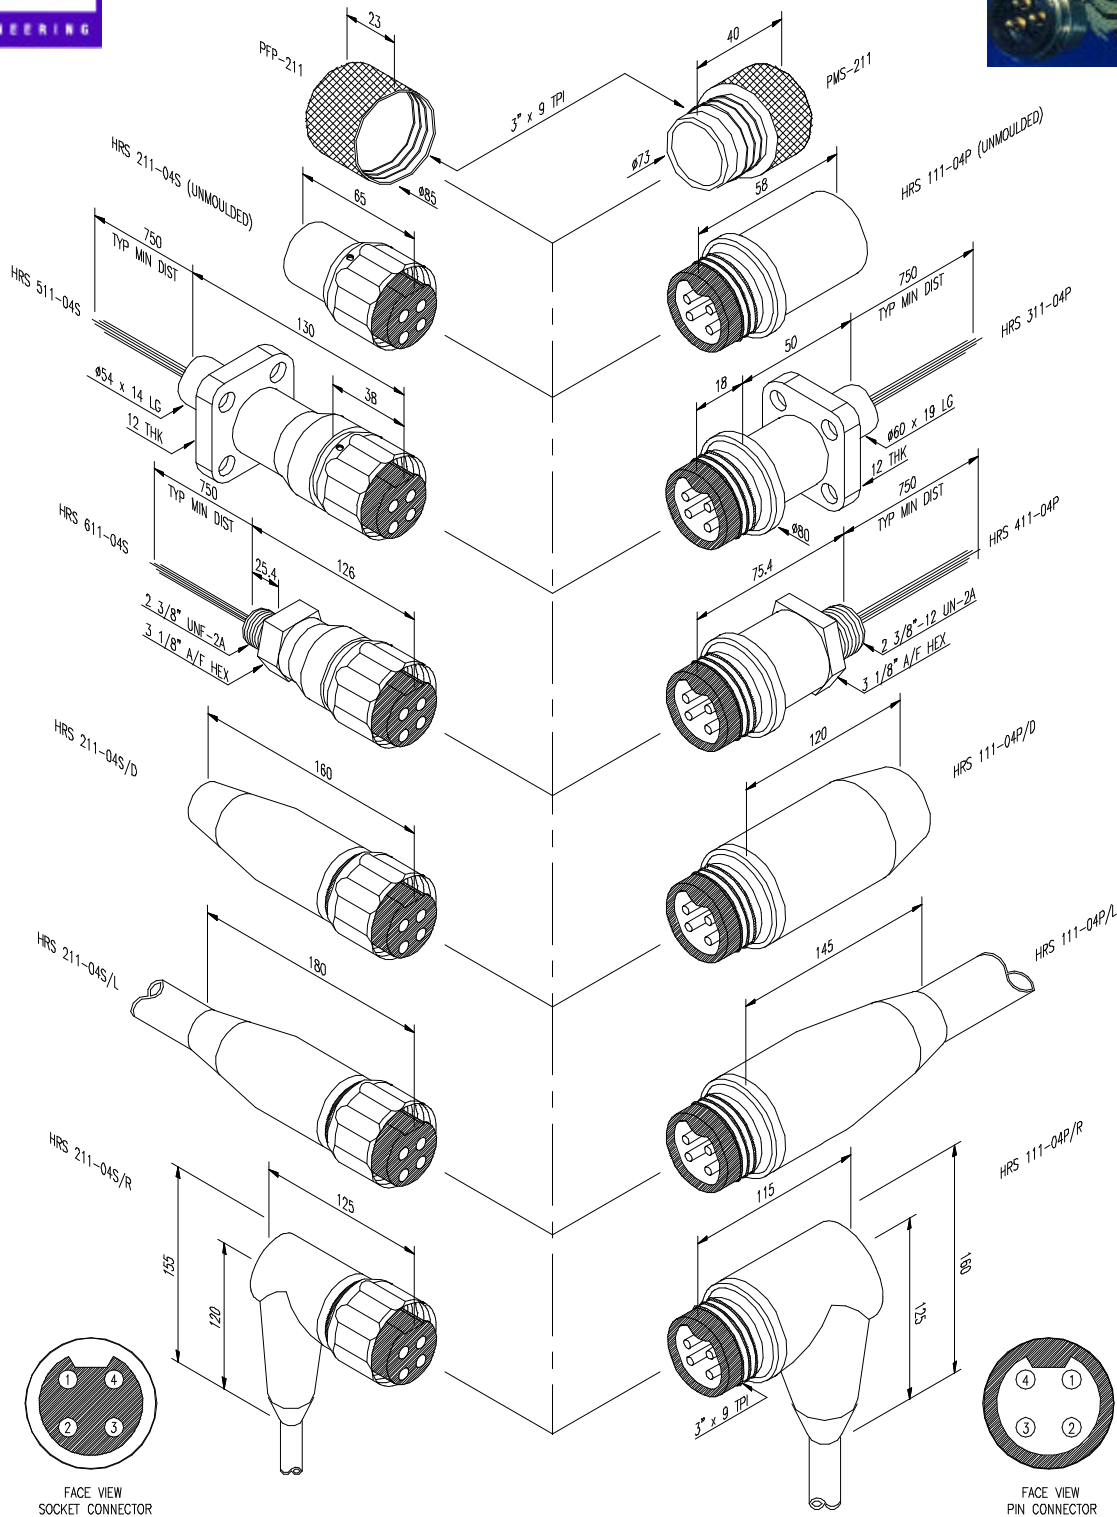

Electrical and Environmental:

Pin Current Rating: 150 Amp
 Pin Voltage Rating: 2,000 V rms
 Contact to Contact IR: >1,000 MOhms @ 1,000 V dc
 Contact to Body IR: >1,000 MOhms @ 1,000 V dc
 Mated Depth Rating: 2,440 MSW
 Temperature Rating: -20 ° C to +60 ° C
 Conductor Tail Size: 35 sq.mm
 Solder Bucket Size: 5.75 mm dia

Standard Material Specification:

Body: 316 Stainless Steel
 Fix Ring: Aluminium Silicon Bronze
 Back Shell: N/A
 Contact Pins: CZ121/Au
 Contact Sockets: CZ121/Au
 Insert Material: Neoprene
 Conductor Tails: Radox 125, 0.75 m.
 O – Rings: NI70

Data Sheet:

Issue: 01

Approved by:

Mechanical:

Lengths = mm
 Threads = Inches
 Mounting Detail:
 See Mounting Detail
 Section of Binder